




professional sewing

HENGTAI products (the structure and advantages of main products)

连续23年亨泰珠边机全球销量第一。
向您推荐我们引以为豪的自动化产品系列

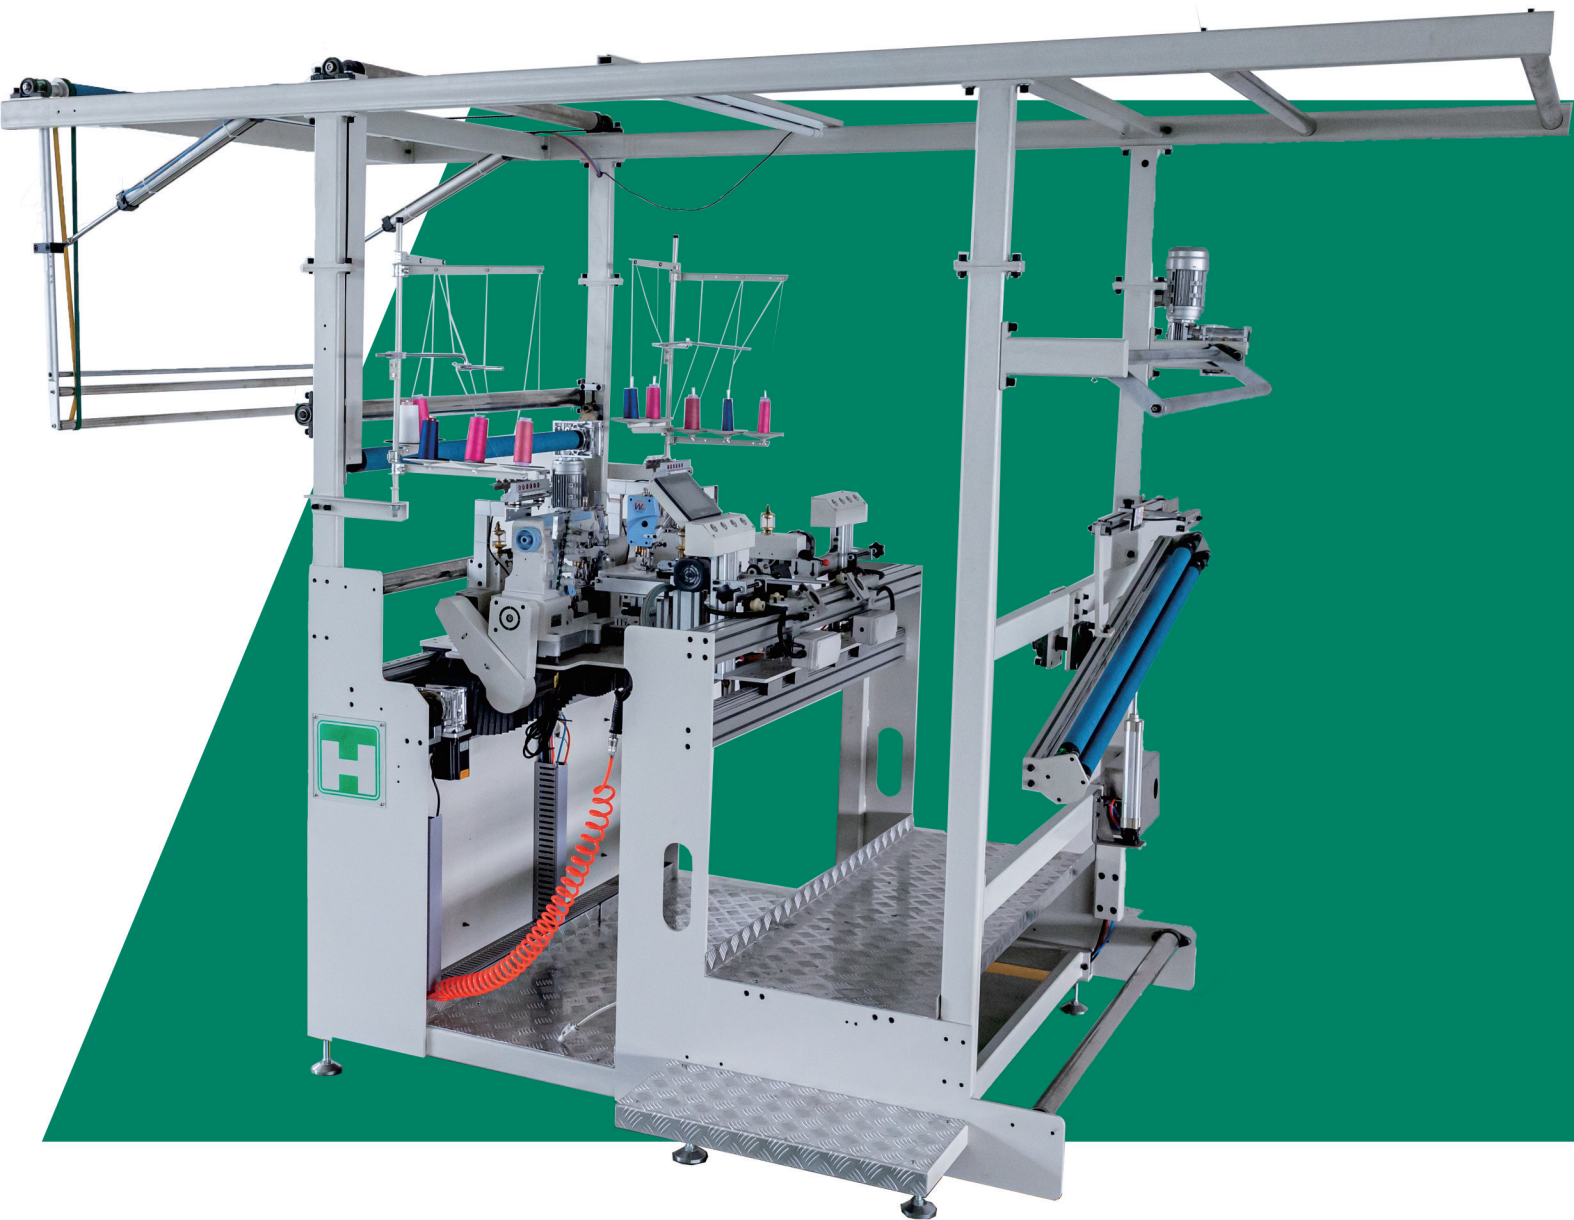

HT-ZF850W 全自动毛巾双边纵向绷缝机
AUTOMATIC DOUBLE SIDE FLAT SEAMING TOWEL MACHINE

特征

- 操作简便，启动电源，打开程序即可实现无人化操作。
- 智能控制，每一件产品线迹工整，规格精准如一。
- 高效率:双边同步缝纫，省去加工繁琐环节；顺利完成裁剪、折边、缝纫自动一体化操作。
- 低耗能，380V电压输入，整机功率4.7KW
- 故障诊断，自动报警，及时发现错误即时纠正。
- 断线检测，自动报警、停机。

Features

- Simple operation, it can be run without worker as soon as electric start and procedure begin.
- Intelligent control, the stitch is regular, and specification is accurate for each.
produce always.
- High efficiency: bilateral synchronous sewing, save the processing cumbersome links; Complete the automatic integrated operation of cutting, folding and sewing smoothly.
- Low energy consumption, power- 380V4.7KW.
- Fault diagnosis and warning automatically, it can solve problem automatically immediately when any fault found in operation.
- Broken line detection, automatic alarm, halt.

HT-ZF850W 全自动毛巾双边纵向绷缝机	100L工业吸尘器一台
可纵缝制毛巾、巾被最大宽度0.85米	输入电压380V
可缝制毛巾产品最小宽度为260毫米	总电流12A
配置左、右缝纫机各一台	总功率4.7kw，洁净压缩空气0.5Mpa
绷缝线迹	最高缝纫速度18米/分（变频可调，以16米/分最佳）
折边器	落布形式一平幅落布
自动纠偏,光电自动跟踪	摆布长度约1米
缝纫时光纤自动跟踪	摆布次数一与缝纫速度同步变频可调
张力按需电动可调	外形尺寸:3800×1700×2730mm; 气压:0.5Mpa
工作时无布自动停车、断线自动停车	
触摸屏显示随机即时机器动态数据,人机对话世界清晰方便	

HT-ZF850W Automatic Double Side Flat Seaming Towel Machine	100 LAnIndustrial Vacuum Cleaner
Length Sewing Towel\The maximum width of Towel is 0.85 meters	Input Voltage 380V
Width Towel is 280MM-850MM	Total Current 12A
Equipped with the left and right sewing machines of Pegasus	Total Power 4.7Kw Clean compressed air 0.5Mpa
Coverstitch	Maximum sewing speed 18m/min (the greater the stitch spacing, the higher the sewing speed)
Seventy percent off flanging machine	Layout form-Flat drop
Automatic correction - photoelectric automatic alignment	Towel Length : Around 1 meters
Sewing time, fiber automatic alignment	The number of swinging towels --Synchronized with sewing speed, variable frequency adjustable
The tension is adjustable by the electric power according to demand	Dimension:3800×1700×2730mm;Pressure 0.5Mpa
When working, no cloth automatic stop, broken line automatic stop	
Touch screen displays random, instantaneous machine dynamic data, man-machine dialogue, the world is clear and convenient	